


TECHNICAL FEATURES PRODUCT

PRODUCT

CURRENT TRANSFORMER TCH12 2500/5 A

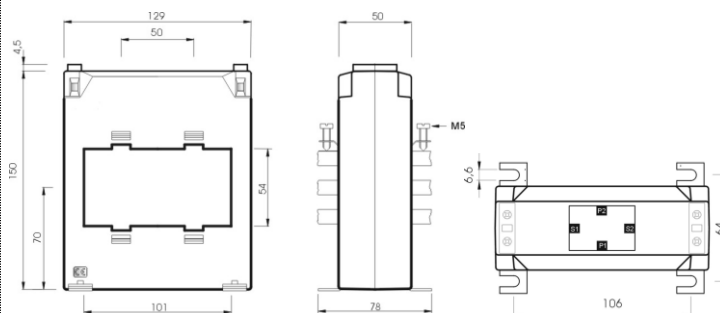

DESCRIPTION	Measuring Current Transformer
SECONDARY OUTPUT	TC terminals 4mm ² solid wire or 6mm ² stranded wire
INNER WINDOW	Busbar 100x50mm
CASE	Polycarbonate Enclosure V0.
APPLICATION	indoor
MARKED	Plate of characteristics. Label in grey poliéster 38X26 mm
ACCESORIES	Steel mounting brackets.
PACKED	Cardbord Box
STANDARD	I.E.C. 61869-2

RATIO CURRENT TRANSFORMER	2500 A / 5 A
RATED BURDEN	0.3-5 VA
ACCURACY CLASS	0,2S
HIGHEST VOLTAGE FOR EQUIPMENT (Um)	720 V _{ac}
DIELECTRIC TEST VOLTAGE	3 kV during 1 minute
RATED SHORT-TIME THERMAL CURRENT	$I_{th} = 60 \cdot I_n$
RATED DINAMIC CURRENT	$I_{dyn} = 2.5 \cdot I_{th}$
FREQUENCY RANGE	50 – 60 Hz
THERMAL CLASS	B(130 °C)
WORKING TEMPERATURE	-25/40°C

REDACTADO	11/12/2018	CURRENT TRANSFORMERS	SUSTITUYE	
VERIFICADO	11/12/2018		SUSTITUIDO POR	

TECHNICAL FEATURES PRODUCT